


Make a Hanging Sleeve (no hand stitching!)


Step 1 - Cut fabric for sleeve - Width is the same width of the quilt AND Height is 1/2" taller than the outside border. Example: if height of outside border is 3" before attached, then cut sleeve 3-1/2" high.

Cut fabric width of quilt AND 1/2" taller than outside border.


Step 2 - Fold side edges twice, approx. 1/2" for each fold. Press & stitch along folded edge.

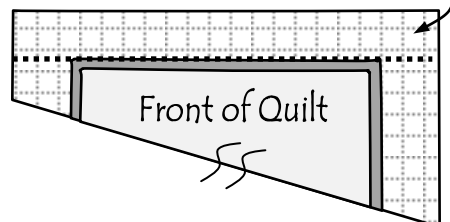


Step 3 - Center & place sleeve, face down - with top edge of sleeve 1/4" above seam of outside border.

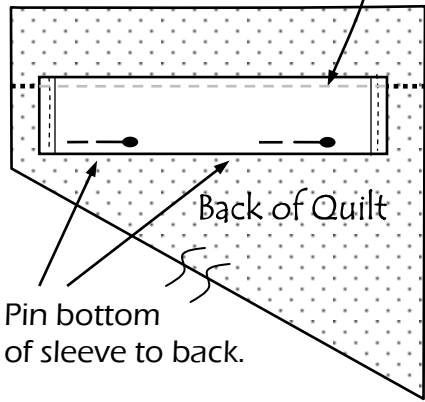

Step 4 - Flip quilt over to front. Stitch in-the-ditch between top inside and outside border

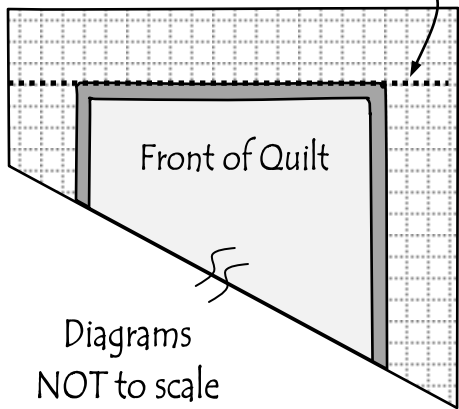

Step 5 - From back of quilt, bring sleeve up to top of quilt and press. Stitch 1/8" along top edge.

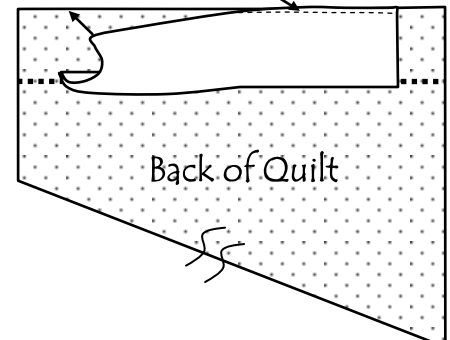

Two-fabric flanged binding - also attached completely by machine!

Step 1 - cutting the two fabrics

Cut "main" fabric strips 1-1/4" wide

Cut "contrast" fabric strips 1-12" wide




Length is determined by the measured perimeter of the project plus 12 inches - OR as stated in directions.

Step 2 - Sew "main" binding strips together with mitered ends making one long "main" binding strip.

Sew "contrast" binding strips together with mitered ends making one long "contrast" binding strip.

Step 3 - Lay "contrast" binding strip, face up on table.

Place "main" binding strip, face down over contrast strip. Sew together with a quarter inch seam.



Step 4 - Press seam towards "main" fabric.

Fold in half with wrong sides together.

Press again, making a sharp press.



Step 5 - Using your walking foot, sew binding to BACK of quilt with a quarter inch seam. "Main" fabric is facing quilt back. Leave 5-6 inches for joining ends.

Step 6 - Join ends. Press. Turn binding over to front. Use thread to match contrast fabric. Stitch in-the-ditch between main & contrast binding.

