


How-to "miter" join flanged (& double fold) bindings!


Sew binding to BACK of quilt, choosing one long side edge AND ➡ leaving at least a 6 inch "tail" on BOTH ends.




Open beginning end and draw diagonal line as shown in photo. Measurement is determined by the *opened width* of binding. In this case, the opened width is 2-1/4", so measure 2-1/4" from top corner and draw line to bottom corner.

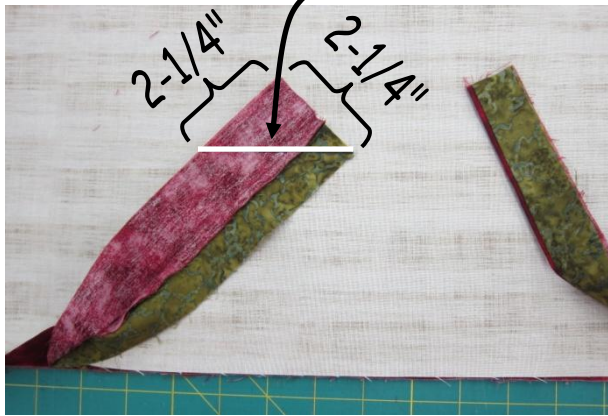

Lay beginning binding strip along quilt edge - place End binding strip over beginning end, then fold back over itself.

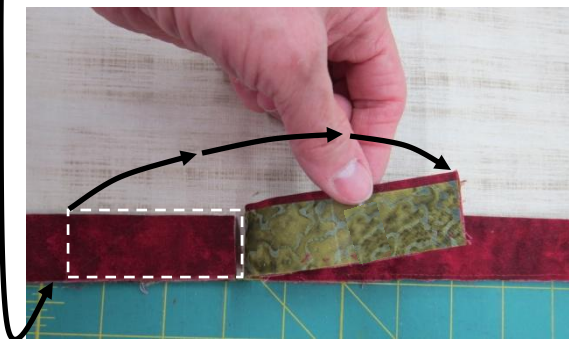

From fold of end binding strip, measure 2-1/4", draw line.

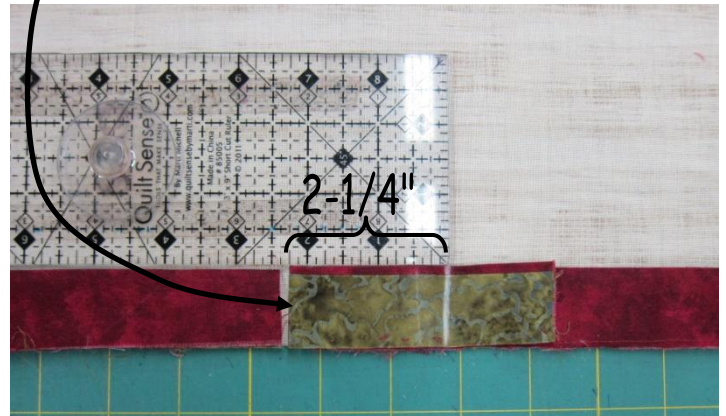


Cut end binding strip on that line.



Lay small cutting mat as shown on quilt back. Turn end binding strip upward as shown here.




Open end binding strip as shown here.

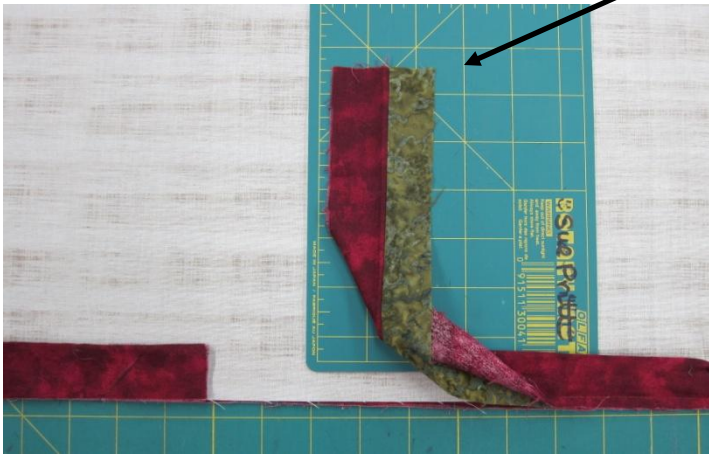


Use two pins and pin on line that you drew on the beginning binding strip as shown here.



Take beginning binding strip straight across without twisting it to line up with outer edge of end binding strip.

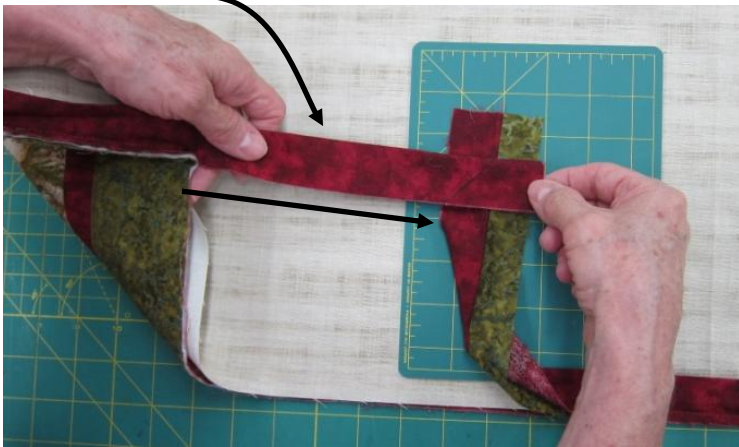

Slowly sew on that line, pulling out the pins as you come to them.

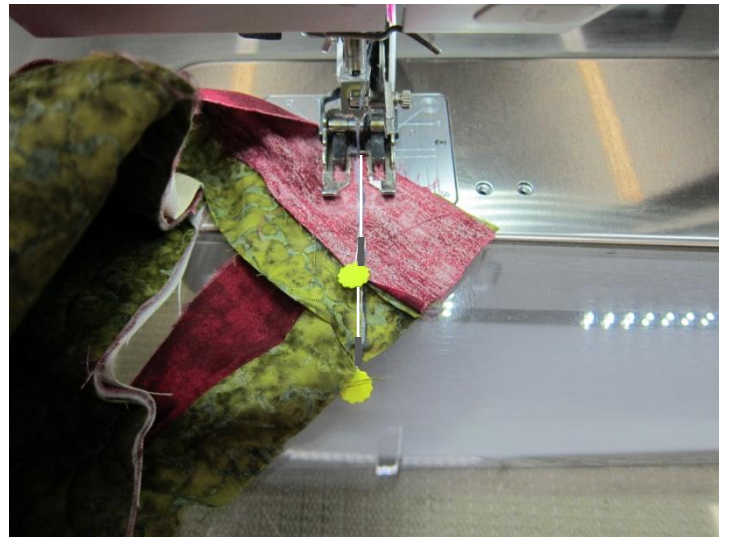

Open the beginning binding strip and line it up so side edge is even with top edge of the opened ending binding strip.



Afterwards, trim away excess and press seam open. THEN fold the flange binding in half once more. Finish sewing binding to quilt back. Flip flange binding over to front, stitch in the ditch between the two fabrics of the flange binding.